INSTEON

# INSTEON On/Off Switch
# 2477S
Quick Start Guide

# INSTEON On/Off Switch

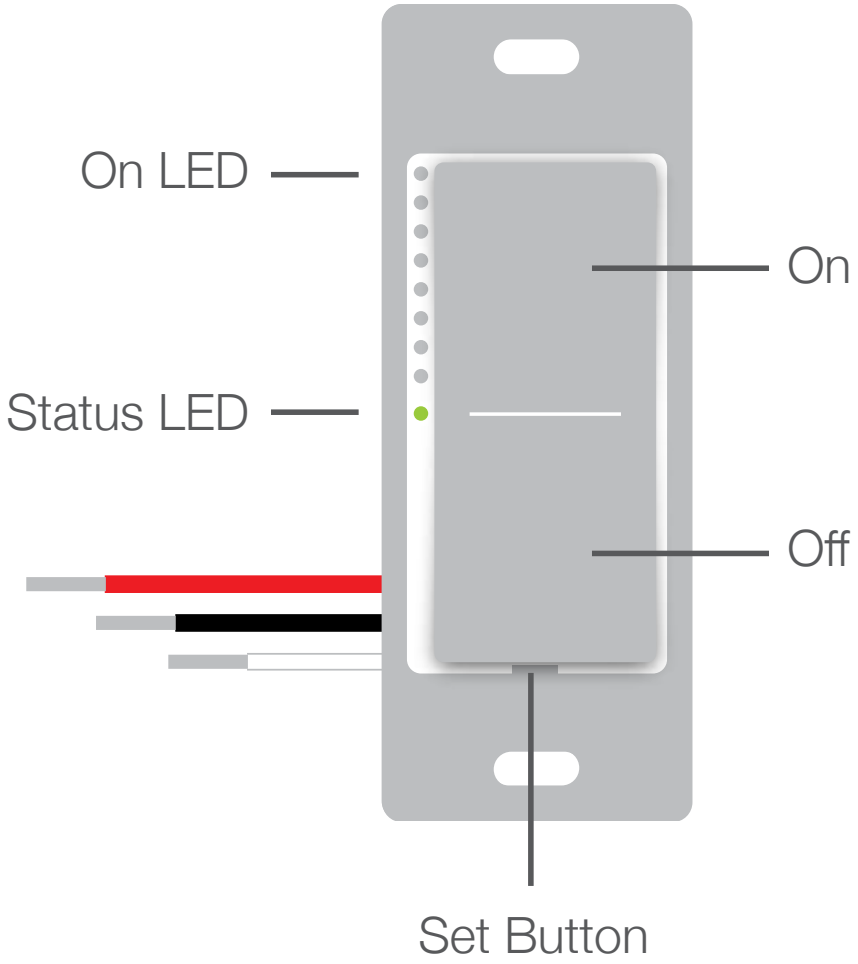

## Tools Needed for Installation

Phillips Screwdriver

Flathead Screwdriver

Voltage Detector

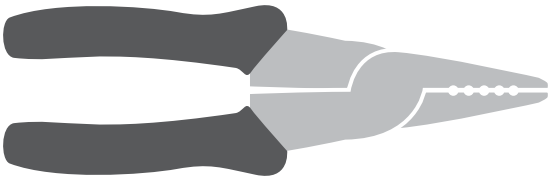

Wire Cutter / Stripper

---

## Disconnect Power



Always disconnect power before installation. Contact INSTEON Support when uncertain about installation.

**1-866-243-8022**

# Basic Installation

1 Turn off power to your switch at the electrical service panel.

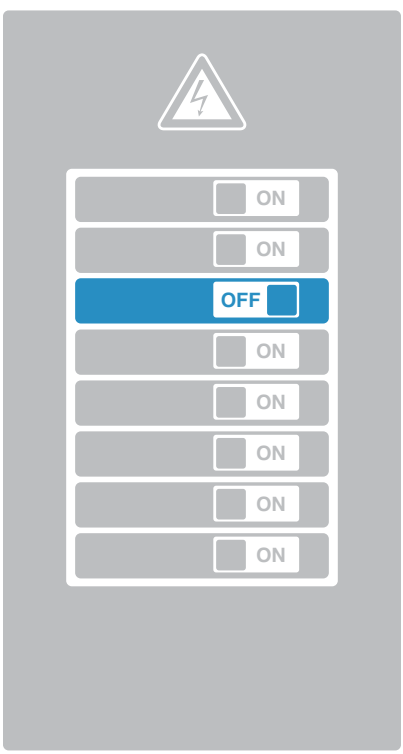


Circuit Breakers

or

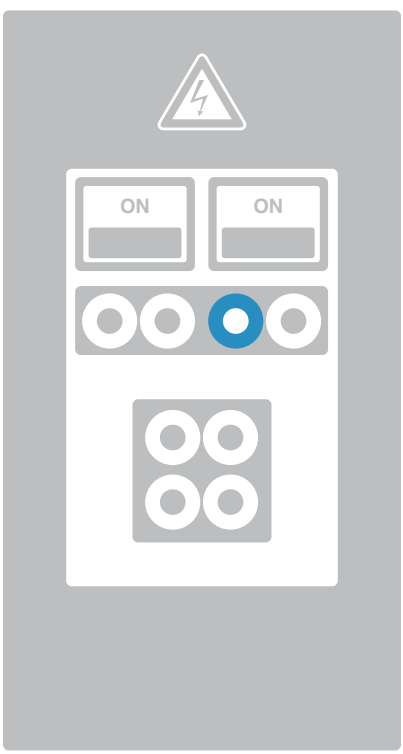


Fuse Panel

Power is ON

Power is OFF

2 Remove the old switch and disconnect the wires. If your box lacks neutral wires, stop and contact support.

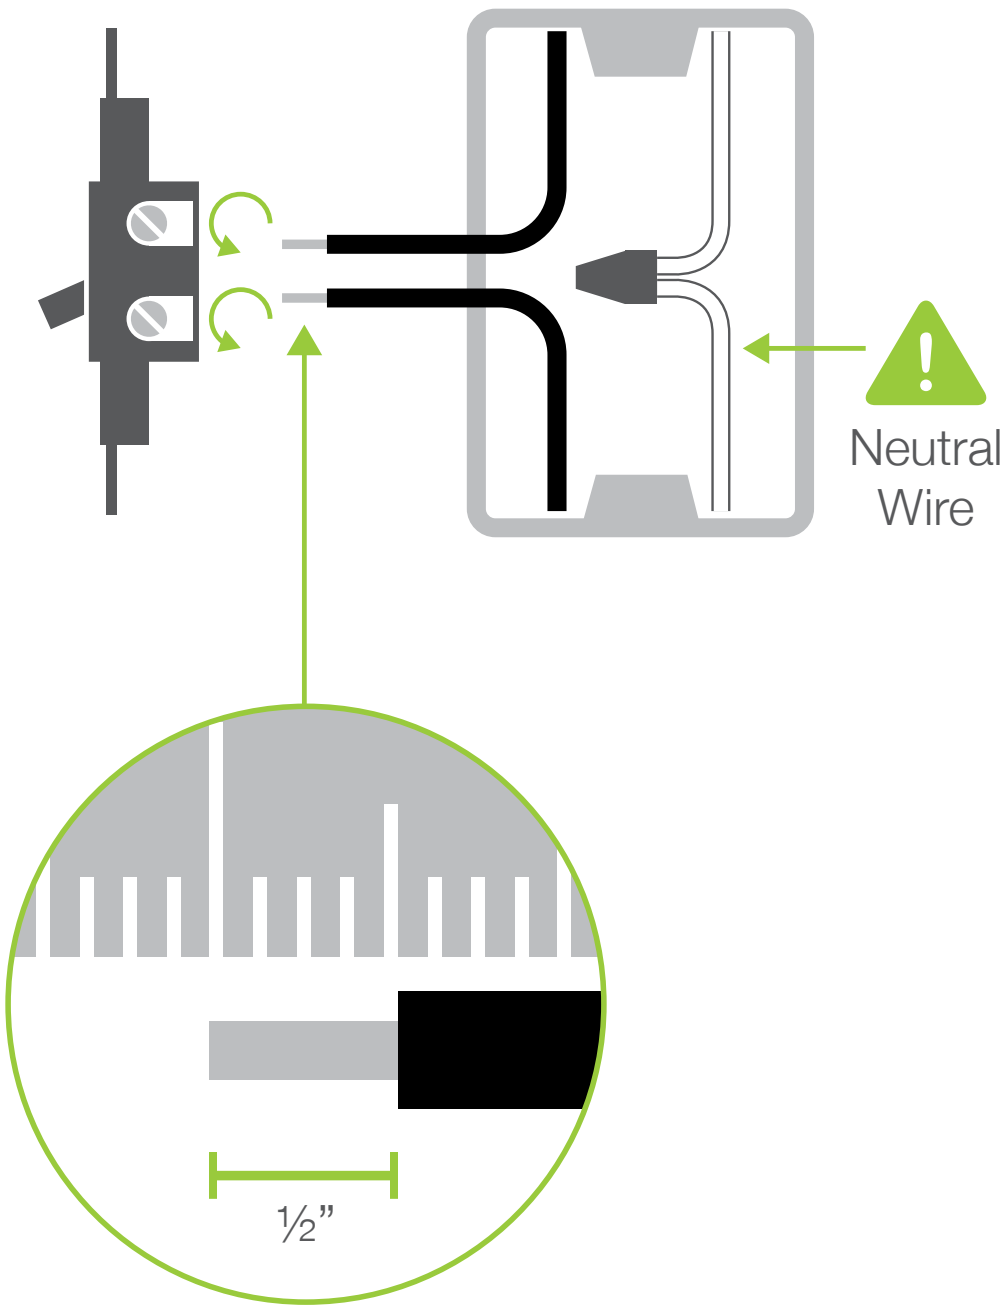

3 Turn on power at the circuit breaker and use a voltage detector or multi-meter to identify **line** and **load**. **Line** will be energized.

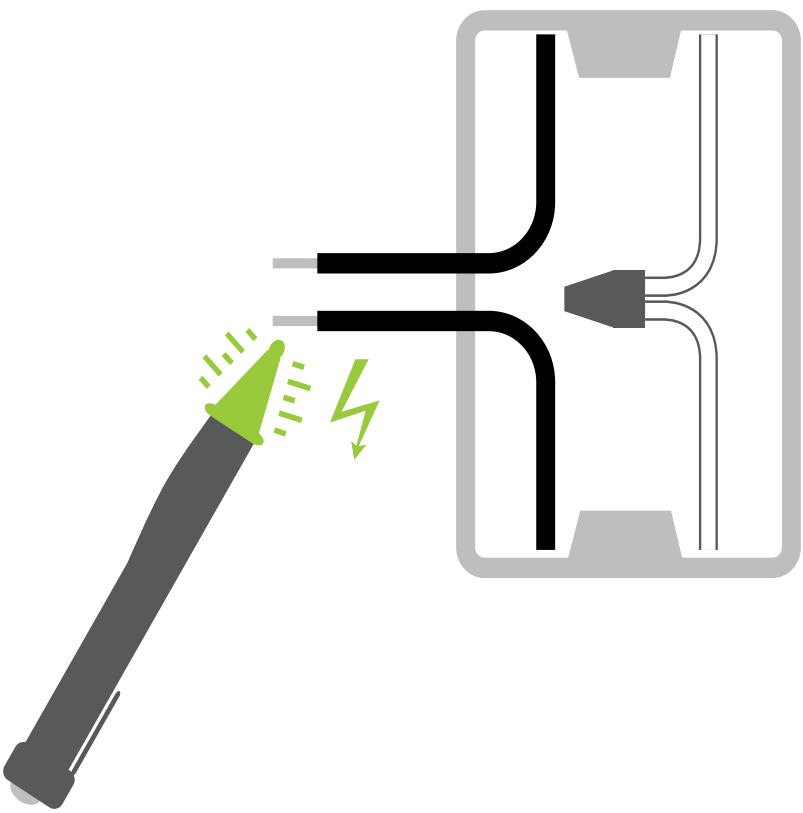

4 Turn off power at the circuit breaker. Connect
the junction box. Verify that the wire nuts are s
except for the bare ground wire.

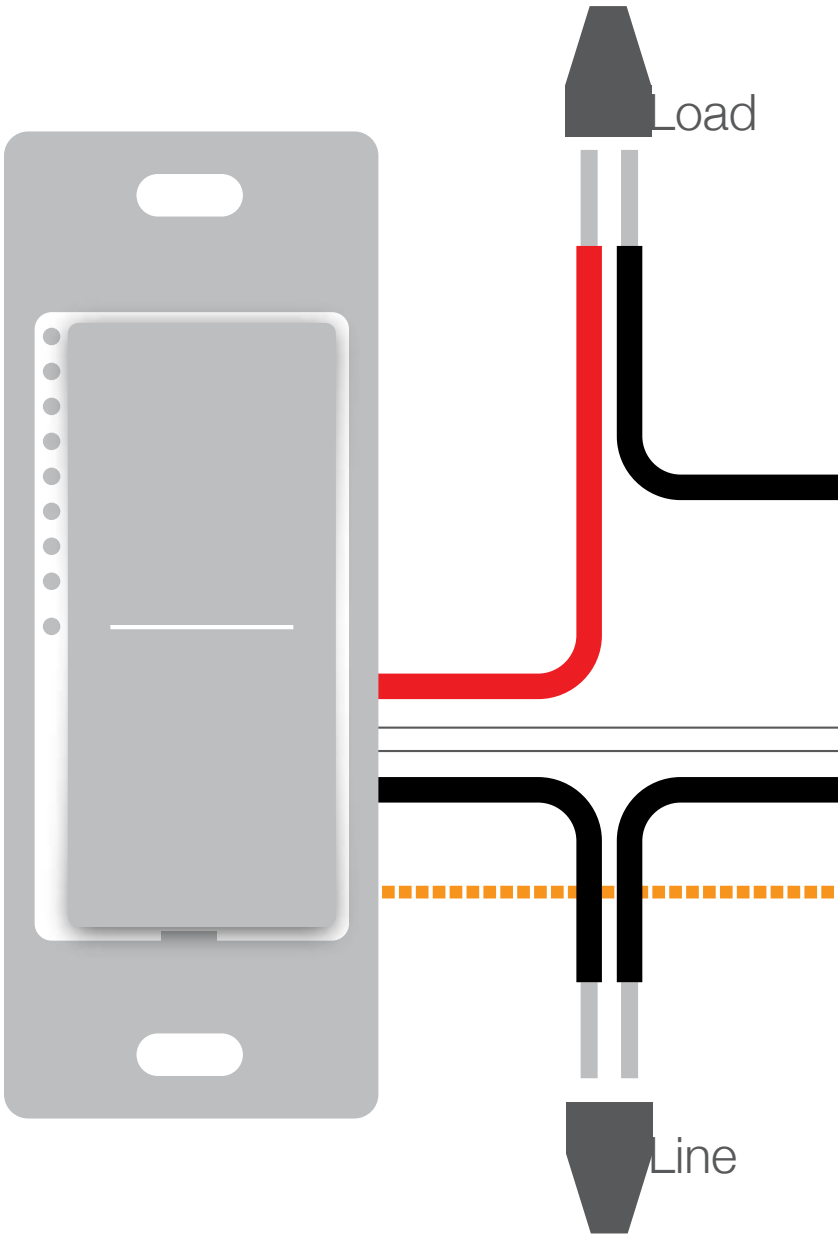

the On/Off Switch wires to the identified wires in
secure and that no exposed copper wire is visible

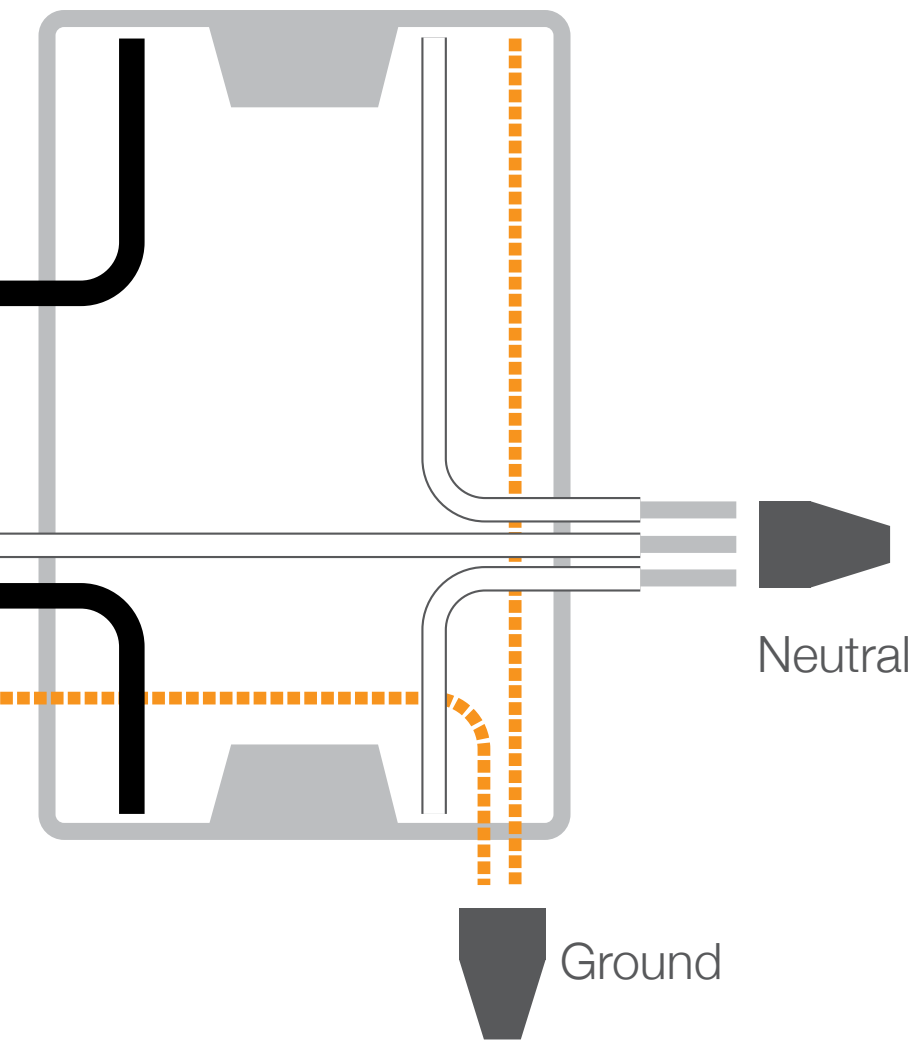

**5** Mount the On/Off Switch into the junction box with the LED bar on the left and turn power on to the switch at the circuit breaker panel.

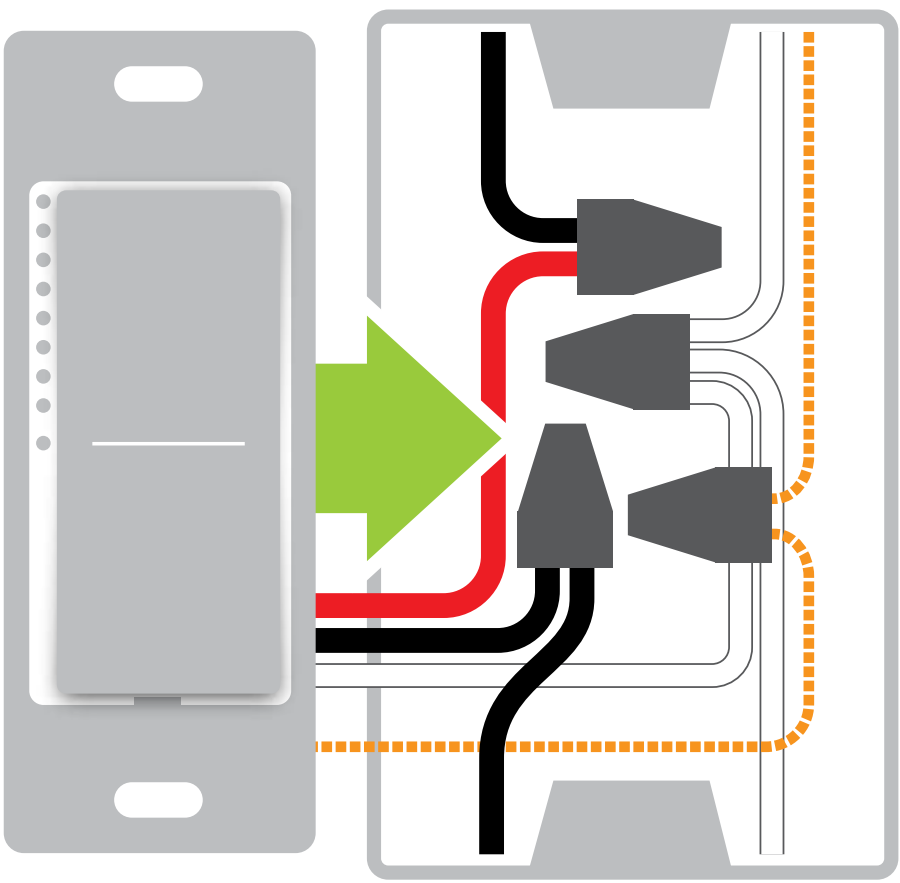

6 Test your On/Off Switch by tapping the paddle to turn On and Off.

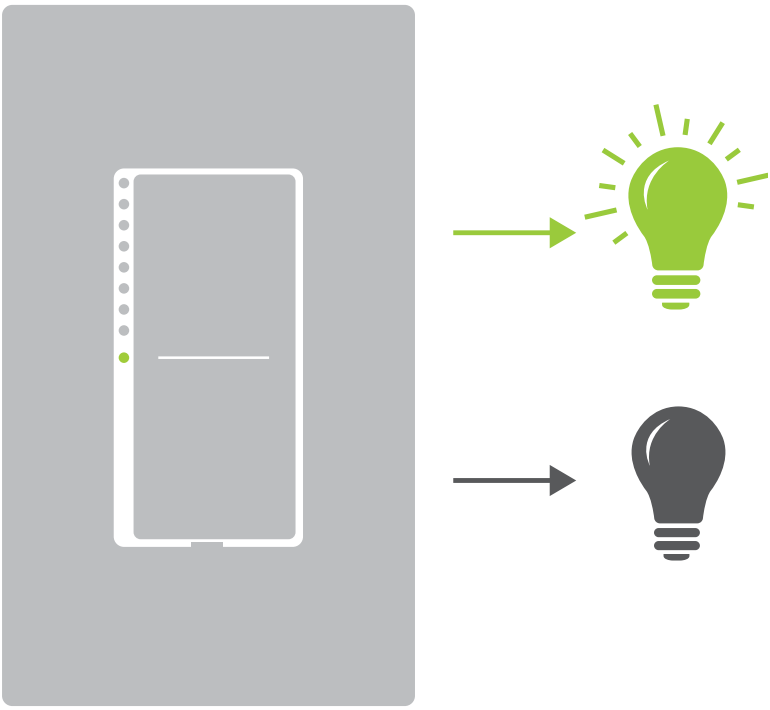

✓ Installation complete. You can now link your On/off Switch to the Hub.

# Linking to the Hub

Follow the on-screen instructions to add your On/Off Switch to the INSTEON Hub.

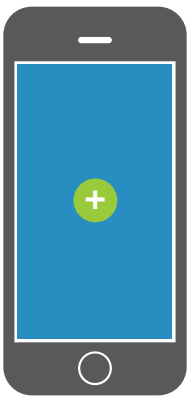

When prompted, press and hold the On/Off Switch's set button.

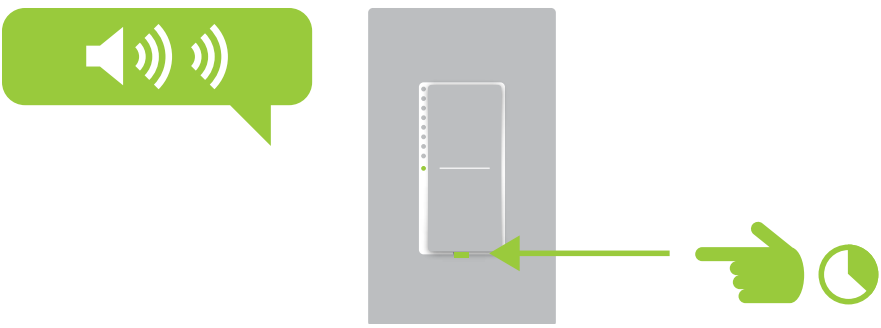

If not using the Hub, refer to the instructions that came with your product.

# Device Control

Turn on, turn off, set schedules and create scenes for your On/Off Switch using the INSTEON Hub and App.

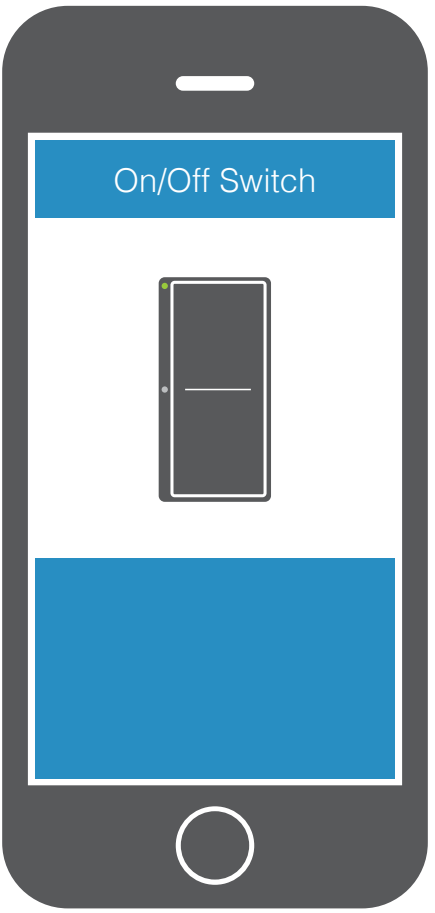


Protected under U.S. and foreign patents (see www.insteon.com/patents)
©2014 INSTEON
RAW-1292 Rev 03.13.14